

# Product Bulletin

supresta™  
BUILT-IN DEFENSE

## Fyrquel® Fire-Resistant Hydraulic Fluids



### Overview

Fyrquel® fire-resistant hydraulic fluids are synthetic pure phosphate ester fluids used in:

- Steel and aluminum furnace hydraulics;
- Die cast hydraulics;
- Reciprocating air compressors; and
- Hydraulics.

Fyrquel® fluids are formulated with synthetic butylated triphenyl phosphates to provide:

- Self extinguishing fire-resistant properties;
- Superior oxidation and thermal stability;
- Good hydrolytic stability;
- Excellent lubrication properties; and
- Biodegradable fluids.

Fyrquel® fluids are self extinguishing, non-aqueous hydraulic fluids that do not support their own combustion. This self extinguishing property exceeds the limits established for "Less Hazardous Hydraulic Fluids" and incorporates phosphate esters' unique true self extinguishing property easily proven by simple flame and wick tests. Fyrquel® fire-resistant fluids reduce the risk of catastrophic fires.

### Safety & Handling

Consult the Material Safety Data Sheet for these products.

### Shipping Information



Available in bulk tank trucks, 55 gallon drums, or 5 gallon pails.

### Superior Fire Properties

	Fyrquel®	PAO	Polyol Ester	Mineral Oil
Flash Point, °F	475	455	595	420
Fire Point, °F	675	530	675	465
Autoignition Temperature, °F	1050	730	775	600
Heat of Combustion, kBTU/lb	13.3	17.2	17.1	17.3
Burning after Heat Source Removal	No	Yes	Yes	Yes

MARKETED BY  
**HARWICK STANDARD  
DISTRIBUTION CORPORATION**  
60 S. Seiberling Street • Akron, Ohio 44305

# Viscosity vs. Temperature

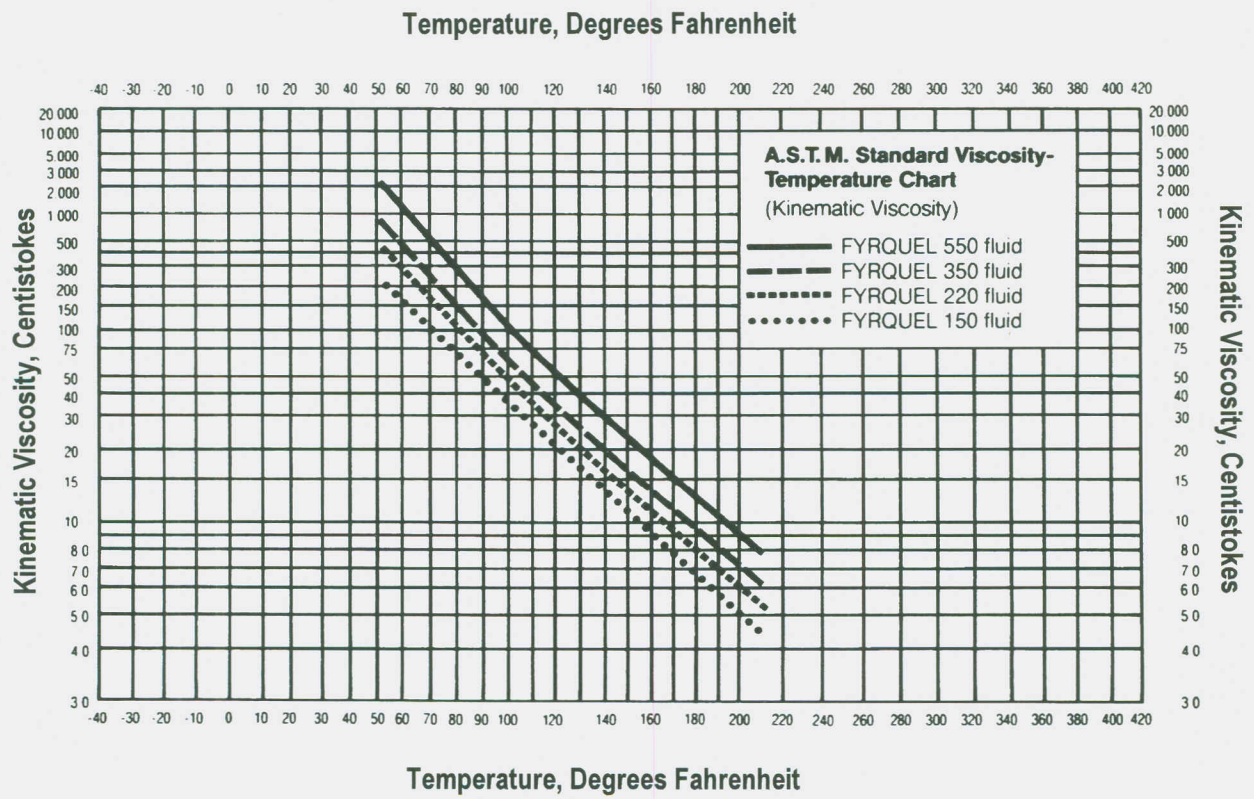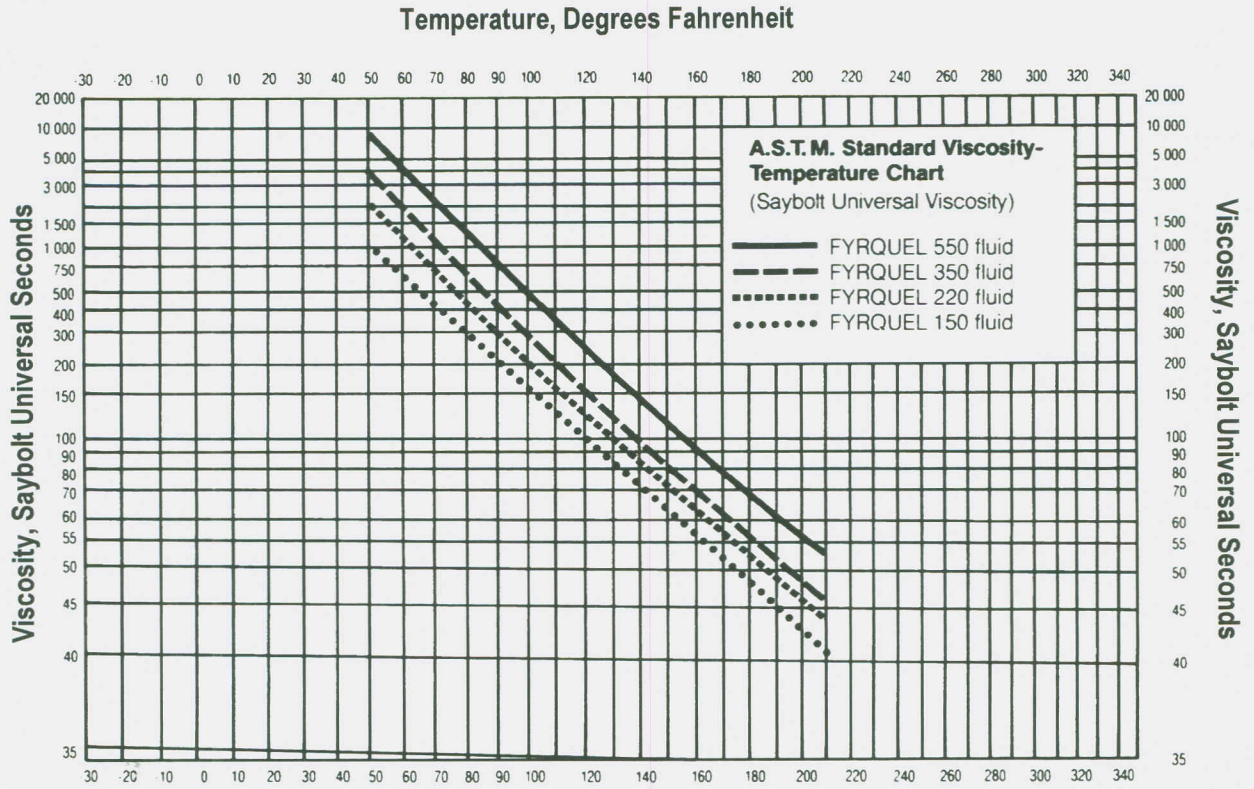



## Typical Properties

### Typical Physical Properties

Fyrquel<sup>®</sup> 150

Fyrquel<sup>®</sup> 220

Fyrquel<sup>®</sup> 300

Fyrquel<sup>®</sup> 550

	Fyrquel <sup>®</sup> 150	Fyrquel <sup>®</sup> 220	Fyrquel <sup>®</sup> 300	Fyrquel <sup>®</sup> 550
Appearance	clear, amber liquid	clear, amber liquid	clear, amber liquid	clear, amber liquid
Viscosity, SUS @100°F	153	219	302	545
ISO Grade	32	46	68	100
Viscosity Index	+25	+25	+25	+25
Specific Gravity @ 60/60°F	1.166	1.150	1.151	1.155
Weight (lb/gal) @ 60/60°F	9.71	9.58	9.59	9.62
Pour Point (°F)	-10	0	5	20
Boiling Point (°F @ 760 mmHG)	755	781	795	815
Water Content (% by weight)	0.05	0.05	0.05	0.05
Acid Number (mg KOH/g)	0.03	0.03	0.03	0.03
ASTM Rust Test, Procedure A	pass	pass	pass	pass

### Engineering Design Data

Evaporation Loss, wt. % (22 hrs @ 300°F)	1.50	1.50	1.50	1.50
Coefficient of Thermal Expansion @ 100°F (ml/ml/°F)	0.0003	0.0003	0.0003	0.0003
Thermal Conductivity @ 77°F (btu/hr/ft <sup>2</sup> /°F/ft)	0.0721	0.0706	0.0721	0.0715
Surface Tension (dynes/cm) @ 68°F	42	42	43	41
Refractive Index @ 68°F	1.555	1.551	1.554	1.555
Heat of Combustion (btu/lb)	13,367	13,459	13,757	13,825
Specific Heat (btu/lb/°F)				
@ 100°F	0.376	0.376	0.381	0.386
@ 300°F	0.441	0.442	0.444	0.461

### Lubricity Data

Shell 4-Ball Test				
1 kg load, Scar dia. mm, avg.	0.25	0.20	0.21	0.16
40 kg load, Scar dia. mm, avg.	0.62	0.54	0.56	0.53

For more information about our products and to place an order, please contact one of Supresta's regional sales offices.

AMERICAS REGIONAL SALES OFFICE  
Ardley Park at 420 Saw Mill River Road  
Ardley, New York 10502 USA  
914.269.5900, 800.666.1200  
fax 914.674.9735

ASIA PACIFIC REGIONAL SALES OFFICE  
12/B, Sun Tong Plaza, No. 55 West Huaihai Road  
Shanghai 200030 China  
86 21 5298 9058  
fax 86 21 5298 9352

EUROPEAN REGIONAL SALES OFFICE  
Hoefseweg 1, PO Box 2501  
3800 GB Amersfoort, The Netherlands  
31 33 4534 575  
fax 31 33 4534578

All information concerning this product and/or suggestions for handling and use contained herein are offered in good faith and are believed to be reliable as of the date of publication. However, no warranty is made as to the accuracy of and/or sufficiency of such information and/or suggestions as to the merchantability or fitness of the product for any particular purpose, or that any suggested use will not infringe any patent. Nothing herein shall be construed as granting or extending any license under any patent. Buyer must determine for itself, by preliminary tests or otherwise, the suitability of this product for its purposes, including mixing this product with other products. The information contained herein supersedes all previously issued bulletins on the subject matter covered.